


# GoWire™ SMART Board™ Software Auto-launch Cable

## Specifications – USB-GW

### Physical Specifications

<b>Length</b>	7' (2.1 m)
<b>Weight</b>	4 oz. (111.0 g)
<b>Shipping Size</b>	9 1/4" W × 6 1/2" H × 2" D (23.5 cm × 16.6 cm × 5.0 cm)
<b>Shipping Weight</b>	6 1/2 oz. (189.0 g)

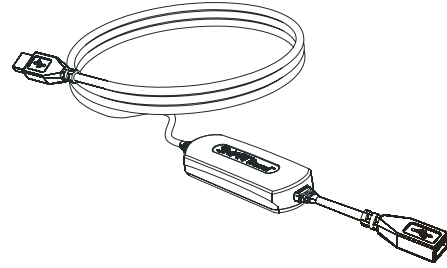

### Standard Features

<b>Software</b>	The GoWire cable contains SMART Board software (Windows® and Mac) and launches it automatically, providing full access to all software tools.
<b>Connectors</b>	USB A receptacle provides a connection to a peripheral device, such as a SMART Board interactive whiteboard  USB A plug connects to a USB 1.1 or 2.0 receptacle on the host computer
<b>Certifications</b>	FCC, CE, VCCI

### Storage and Operating Specifications

<b>Storage</b>	-40°F to 104°F (-40°C to 40°C)
<b>Operating</b>	32°F to 104°F (0°C to 40°C), up to 95% humidity (non condensing)

### SMART Board Software 9.5 Computer Requirements (installed on GoWire cable)

<b>Windows Computers</b>	Pentium® II 450 MHz processor 128 MB of RAM (256 MB recommended) 210 MB of free hard disk space USB receptacle (1.1 or 2.0) Available drive letter for mapping the GoWire cable's drive Windows 2000 (SP3/SP4), Windows XP (or later) Microsoft® Internet Explorer® 6.0 (or later)
--------------------------	--


**NOTE:** Windows 98SE works with the GoWire cable, but you must install a Hagiwara Windows 98SE driver (available at [www.smarttech.com/support/software/gowire.asp](http://www.smarttech.com/support/software/gowire.asp)) and start the GoWire cable's software manually. As well, the AirLiner™ wireless slate is not compatible with Windows 98.

<b>Requirements for SMART Notebook™</b>	Macromedia Flash® player version 8
---	------------------------------------

<b>Requirements for SMART Video Player</b>	Pentium II 450 MHz processor (700 MHz or faster recommended) Microsoft DirectX® technology 8.1 (or later)
--	--

<b>Mac Computers</b>	700 MHz processor (1 GHz or faster recommended) 140 MB of RAM (256 MB recommended) Mac OS X versions 10.3.9 and 10.4.x USB receptacle (1.1 or 2.0) Safari™ 1.3.2 or later GoWire cable software supports both Intel® and PowerPC® processors (Universal Binary)
----------------------	--

**Dimensions**

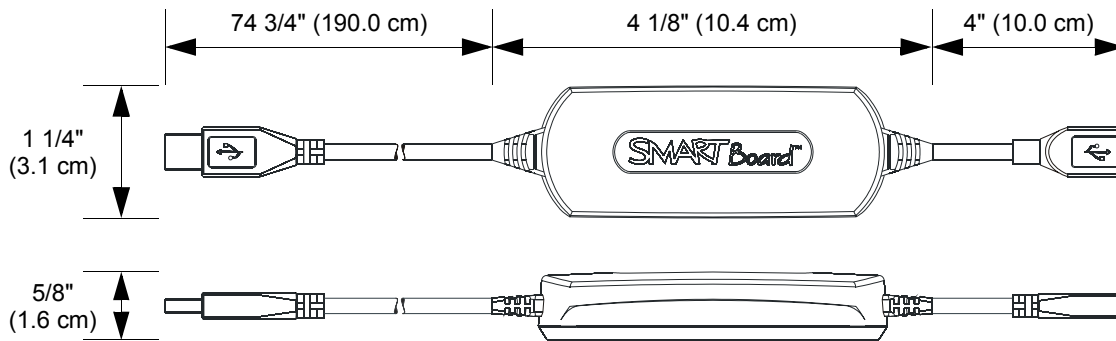

**SMART Order Number**

- |         |  |
|---------|--|
| USB-GW  | GoWire SMART Board software auto-launch cable      |
| USB-ADP | 2 1/2' (76.2 cm) SMART USB-to-serial adapter cable |

**SMART Technologies Inc.**  
1207 – 11 Avenue SW, Suite 300  
Calgary, AB T3C 0M5  
CANADA  
Phone +1.403.245.0333  
Toll Free 1.888.42.SMART (Canada/U.S.)  
info@smarttech.com www.smarttech.com

